



55 inches



OUTDOOR SCREEN 55 INCHES

Digital information can be professionally presented on a 24/7 range at any place.

The special LCD display is easily readable in sunlight and protected by an anti-reflective glass front with UV and IR filters.

A specially developed ventilation and heating system allows the use in extreme areas such as ski regions, the railway sector, production facilities with dust pollution and heat.

Made from extruded aluminum profiles.



MONITOR

Monitor	Blackening Defect Free, up to 110°C (230°F)	
Screen Size	55" with active display area 681 x 1210 mm	
Brightness attribute	2500 nit - cd/m²	
Resolution	1920 x 1080	16 : 9
Temperature range	0° - + 40°	
Viewing angle	178° / 178°	
Video Input	DVI, HDMI - RS 232	

HOUSING

Construction	aluminium construction/ST profile system	
Opening	swing door with opening limiter	
Glazing	VSG-safety glass, 9.14 mm, non-glare	
Filter	UV-ultraviolet + IR-infrared radiation	
Protection class	IP 54 vs. IP 65	
Surface	E2-C 31 Nirox, stainless steel optics	
Lock	pressure controlled interlock system	
Art.-No.	016-1029	


AIR-CONDITIONING -33°C to +40°C

Ventilation	air-to-air heat exchanger	
Heating	2x 250 watt integrated	
Accessories	thermostats, 2 sockets, fuse-protection ca.	
Noise emission	39 db	

PC - MEDIAPLAYER

Medioplayer	play format: PPT, Flash, PDF, Video etc.	
Software	POS-Software for content management	
PC	optional according to customer requirement	

MEASUREMENT

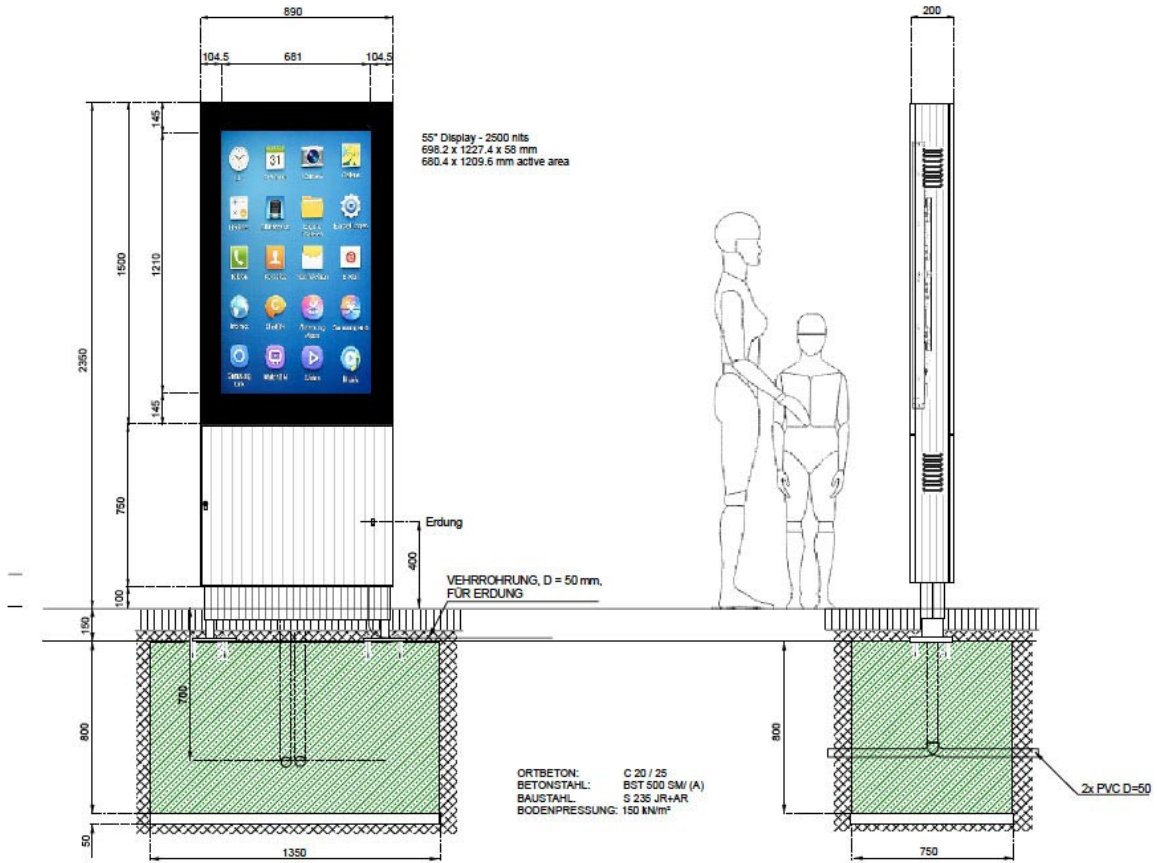

ELECTRICAL CONNECTION

3x 2,5 m² -16 A - 230 V/50 Hz - NYY-J

current consumption 340 W (typ) - 530 W (max)